

06-28-00

Patent Application Transmittal

(only for new nonprovisional applications under 37 C.F.R. 1.53(b))

Correspondence Address:

FROMMER LAWRENCE & HAUG LLP

745 FIFTH AVENUE

NEW YORK, NEW YORK 10151

TEL: (212) 588-0800

FAX: (212) 588-0500

Date: June 27, 2000

Attorney Docket No.: 450100-02579

ASSISTANT COMMISSIONER FOR PATENTS

Box Patent Application

Washington, D.C. 20231

Sir:

With reference to the filing in the United States Patent and Trademark Office of an application for patent in the name(s) of:

Hirokazu NAGASAWA, Yoshitsugu NOMIYAMA, Masaaki KOJIMA

entitled:

SIGNAL INPUT AND OUTPUT APPARATUS

The following are enclosed:

- ☒ Specification (23 pages)
☒ 3 Sheet(s) of Drawings
☒ 10 Claim(s) (including 2 independent claim(s))
 This application contains a multiple dependent claim

- ☒ Our check for \$ 690.00, calculated on the basis of the claims as amended by any enclosed preliminary amendment as follows:

Basic Fee, \$690.00 (\$345.00)	\$ 690.00
Number of Claims in excess of 20 at \$18.00 (\$9.00) each:	-0-
Number of Independent Claims in excess of 3 at \$78.00 (\$39.00) each:	-0-
Multiple Dependent Claim Fee at \$260.00 (\$130.00)	-0-
Total Filing Fee	\$ 690.00
Assignment Recording Fee \$40.00	-0-

- ☒ Oath or Declaration and Power of Attorney

☒ New ☐ signed ☒ unsigned
☐ Copy from a prior application (37 C.F.R. 1.63(d))

- ☒ Certified copy of each of the following application(s) to substantiate the claim(s) for priority made in the Declaration:

Application No.FiledIn

11-183817

29 June 1999

Japan

Please charge any additional fees required for the filing of this application or credit any overpayment to Deposit Account No. 50-0320.

Respectfully submitted,

FROMMER LAWRENCE & HAUG LLP
 Attorneys for Applicants

B

William S. Frommer
 William S. Frommer
 Reg. No. /25,506

FROMMER LAWRENCE & HAUG LLP

745 FIFTH AVENUE NEW YORK, NEW YORK 10151

June 27, 2000

Assistant Commissioner for Patents
Washington, D.C. 20231

Re: U.S. Patent Application
Applicants: Hirokazu NAGASAWA, Yoshitsugu NOMIYAMA, Masaaki
KOJIMA
Our Ref.: 450100-02579

Dear Sir:

Enclosed are papers constituting the above patent application which is being filed under 37 C.F.R. 1.53 without a signed Declaration. Please accord a filing date and a serial number to such application and inform the undersigned thereof so that a signed Declaration and the surcharge required by 37 C.F.R. 1.16(e) may be duly filed.

Please address all correspondence to:

William S. Frommer, Esq.
FROMMER LAWRENCE & HAUG LLP
745 Fifth Avenue
New York, New York 10151

Respectfully,



William S. Frommer
Reg. No. 25,506
Attorney for Applicants
Enclosures

450100-02578

1cass U.S. PTO

09/604632

"Express Mail" mailing label number EL560675817USDate of Deposit June 27, 2000

I hereby certify that this paper or fee, and a patent application and accompanying papers, are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and are addressed to the Assistant Commissioner for Patents, Washington, DC 20231.

Charles Jackson

(Typed or printed name of person mailing paper or fee)

Charles Jackson

(Signature of person mailing paper or fee)

00604632 062700

PATENT
450100-02579

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICATION FOR LETTERS PATENT

TITLE: SIGNAL INPUT AND OUTPUT APPARATUS

INVENTORS: Hirokazu NAGASAWA, Yoshitsugu NOMIYAMA,
Masaaki KOJIMA

William S. Frommer
Registration No. 25,506
FROMMER LAWRENCE & HAUG LLP
745 Fifth Avenue
New York, New York 10151
Tel. (212) 588-0800

00604632.062700

SIGNAL INPUT AND OUTPUT APPARATUS

BACKGROUND OF THE INVENTION

Field of the Invention:

The present invention relates to automatic discrimination of signals transmitted between an electronic appliance and a peripheral device connected thereto, which may be applied, for example, to a video tape recorder integrated with a camera.

Description of the Related Art

A conventional video tape recorder integrated with a camera (hereinafter called a camcorder) is composed of a camera unit and a VTR unit, in which the image of a subject taken by the camera unit is converted into an electric signal, and the signal is subjected to a specified process by the VTR unit, and is later magnetically recorded in a magnetic tape.

A peripheral device such as a printer and a personal computer can be connected to this camcorder through a cable. By connecting the printer thereto, the data supplied from the camcorder can be printed, or by connecting the personal computer thereto, the mode and operation of the camcorder can be set or adjusted.

However, since interface formats of transmitted signals are different depending on the peripheral devices connected to the camcorder through cables, there has been a demand that the camcorder be constituted so that cables of plural interfaces can be connected thereto

002290-2540960

In such a conventional camcorder, even if a jack is constituted such that cables of plural interfaces are capable of being connected, when signals of two or more kinds are passed onto a same signal line, an undesired signal flows into the camcorder side, which may cause malfunction thereof.

If the signal line is divided into a plurality of lines depending on the types of signals, the number of the cable increases, and there is an inconvenience that the jack of the camcorder side becomes larger in size.

Or if a signal of a large signal level passes in a signal system of a small signal level, the input system of the signal system of a small signal level becomes an excessive input, and the input element may be broken.

If a different signal is passed to the same jack, it requires a changeover of the control system by discriminating the different signal.

Another inconvenience is that the operation is complicated in order to change over the control system on the basis of the detection result of the signal.

SUMMARY OF THE INVENTION

The invention is devised in consideration of the above problems, and it is hence an object thereof to propose a signal input and output device for changing over the control depending on the result of detection by discriminating the type of signal when signals of two or more types flow in the same signal line.

To solve the above problems, a signal input and

output apparatus of the present invention has the following configuration and operation.

The signal input and output apparatus issues a control signal from a signal processor to the outside by a controller through a transmission path, and controls the signal processor by the controller on the basis of a control signal entered from the outside.

In particular, it comprises signal discrimination changeover means for discriminating the type of the control signal entered through the transmission path, generating a discrimination signal, supplying it to the controller, and changing over the control of the signal processor to the controller on the basis of the discrimination signal, and therefore input and output of plural control signals are processed through a single transmission path.

The signal discrimination changeover means discriminates types of plural control signals, and generates discrimination signals. The controller changes over the control of the processor depending on a discrimination signal. As a result, although, in principle, signals of different signal levels cannot be passed on the same transmission path, by changing over the control of the signal processor, the transmission and reception paths and transmission and reception elements of one signal and other signals can be optimized, so that plural control signals can be passed on the same transmission path.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a diagram showing a connection state of a camcorder and peripheral device in which a signal input and output apparatus according to an embodiment of the invention is applied;

FIG. 2 is a circuit diagram showing a configuration of a signal discrimination changeover unit of the camcorder of the embodiment of the invention; and

FIG. 3 is a diagram showing signals of the embodiment of the invention, in which FIG. 3A is a LANC signal (type A signal), FIG. 3B is an RS-232C signal (type B signal), and FIG. 3C is a limit RS-232C signal (type B signal).

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring now to the drawings, an embodiment of the invention is described in detail below. A signal input and output apparatus of the embodiment is applied to an electronic appliance, for example, a camcorder.

FIG. 1 is a diagram showing a connection state of a camcorder and peripheral devices to which the signal input and output apparatus of the embodiment of the invention is applied.

The camcorder 1 to which this invention is applied is composed of a camera unit and a VTR unit, and the image of a subject taken by the camera unit is converted into an electric signal, and the signal is processed as described below in the

VTR unit, and is magnetically recorded in a magnetic tape.

In FIG. 1, the camcorder 1 comprises, although not shown, lenses of the camera unit, a charge coupled device (CCD), a camera signal processing circuit for processing video signals from the lenses and CCD by color correction or others so as to be processed in a later stage, and a controller 4 having a microcomputer for controlling the camcorder 1.

The camcorder 1 further comprises, as a VTR unit, although not shown, a recording and reproduced signal processing circuit for performing modulating and demodulating, heads, a tape, and a driver for modulating and demodulating digital video signals from a digital still camera or the like.

The camcorder 1 also includes a jack 2 which can feed an adjusting signal (LANC interface signal) from the outside into the signal processor, and send an adjusting signal (LANC interface signal) from the signal processor to the outside, and also can feed a digital still signal (RS-232C interface signal) from the outside into the signal processor, and send a digital still signal (RS-232C interface signal) from the signal processor to the outside.

The camcorder 1 still more includes a signal discrimination changeover unit 3 which discriminates the type of control signal supplied into the jack, in particular, from a peripheral device connected to the outside through a cable, and changes over the controller 4. A controller 4 changes over the signal processor depending on the discrimination signal from the signal discrimination changeover unit 3. As a result, an

optimum changeover is realized depending on the type of the signal.

The camcorder 1 is connected to peripheral devices as described below.

A peripheral device 5-1 is, for example, composed of a personal computer and others, and incorporates an adjusting value setting circuit for setting the modes such as ordinary operation mode and still operation mode for supplying mode signals and adjusting value signals to the camcorder 1, and adjusting the zoom, color and others, and a signal detecting circuit for detecting various output signals from the camcorder 1. The mode setting and adjusting value setting circuits of the peripheral device 5-1 are connected to the jack 2 of the camcorder 1 through a cable 6-1 and a plug 7-1. As a result, type A signal (LANC interface signal) is mutually transmitted and received between the camcorder 1 and the peripheral device 5-1, so that the modes can be set and adjusted.

Herein, the LANC (a registered trademark of Sony Corp., also called Control L) interface is a method of two-way communication control by one line between the camcorder which is the master and the peripheral device which is the slave. By this system, the camera, VTR, and tuner can be connected easily, and the VTR can be manipulated from the camera or the tuner. Or, by connecting an editing machine, two VTRs can be controlled. Moreover, by connecting a personal computer, the user's original application software can be executed.

A peripheral device 5-2 is, for example, a printer,

and is connected to the jack 2 of the camcorder 1 through a cable 6-2 and a plug 7-2. As a result, type B signal (RS-232C interface signal) is mutually transmitted and received between the camcorder 1 and the peripheral device 5-2, so that a still picture can be printed.

A peripheral device 5-n is connected to the jack 2 of the camcorder 1 through a cable 6-n and a plug 7-n. As a result, type Z signal is mutually transmitted and received between the camcorder 1 and the peripheral device 5-n, so that various operations are executed.

FIG. 2 is a circuit diagram showing the structure of the signal discrimination changeover unit of the camcorder of the embodiment. In this structure, for example, two different signals, LANC signal (type A signal) and RS-232C signal (type B signal), are transmitted and received between the camcorder 1 and peripheral devices 5-1, 5-2 through one jack 2.

FIG. 3 shows various signals of the embodiment, FIG. 3A showing LANC signal (type A signal), FIG. 3B showing RS-232C signal (type B signal), and FIG. 3C showing limit RS-232C signal (type B signal).

Herein, the LANC signal (type A signal) requires one DC power line, one two-way signal line (0 V to 5 V swing), and one grounding line. The RS-232C signal (type B signal) requires one transmission signal line from the main body (± 10 V swing), one reception signal line (± 10 V swing), and one grounding line. Usually, for connecting them to the main body, five lines must be connected by using one grounding line commonly, but in the

embodiment, it is achieved by connecting four lines as shown in FIG. 2.

In FIG. 2, the signal discrimination changeover unit of the embodiment has the jack 2 (6 wires) which is constituted in the way that the plug 7-1 (3 poles) for feeding the LANC signal or the plug 7-2 (4 poles) for feeding the RS-232C signal can be inserted thereto.

When the plug 7-1 (3 poles) for feeding the LANC signal is inserted into the jack 2, contact (a) and contact (f) of the jack 2 contact with the grounding (GND) junction of the plug 7-1, contact (b) and contact (c) come into contact with the power source LANC DC junction of the plug 7-1, and contact (d) and contact (e) come into contact with the two-way signal LANC SIG junction of the plug 7-1.

Or, when the plug 7-2 (4 poles) for feeding the RS-232C signal is inserted into the jack 2, contact (a) of the jack 2 comes into contact with the transmission signal 232C TD junction of the plug 7-2, contact (f) comes into contact with the grounding GND junction of the plug 7-2, contact (b) and contact (c) come into contact with the open-end OPEN junction of the plug 7-2, and contact (d) and contact (e) come into contact with the reception signal 232C RD junction of the plug 7-2.

The contact (d) of the jack 2 is connected to the ground through a resistor 21, connects with a resistor 20 in series, and is connected to XLANC JACK IN terminal for detecting insertion of jack of HI (human interface) controller 11.

The contact (e) of the jack 2 is connected to a

resistor 33 in series with its input level being limited to 7.5 volts by a Zener diode 32, and is connected to 3-volt power source EVER 3V through a diode 36 and a resistor 35.

The contact (b) and contact (c), and contact (d) and contact (e) of the jack 2 are mutually cut off when the plug 7-1 (3 poles) or plug 7-2 (4 poles) is not inserted in the jack 2, and the contacts are connected when either is inserted.

Therefore, when the plug 7-1 (3 poles) or plug 7-2 (4 poles) is not inserted in the jack 2, the contact (d) and contact (e) of the jack 2 are cut off, and the contact (d) is connected to the ground through the resistor 21, and therefore a low level L is detected at the XLANC JACK IN terminal for detecting insertion of jack of the HI controller 11. At this time, the HI controller 11 turns off both XLANC ON terminal and 232C ON terminal. Thus, the HI controller 11 monitors the voltage of the XLANC JACK IN terminal, and low level L is detected, so that absence of plug is detected, the XLANC ON terminal and 232C ON terminal are both turned off, so that the power of the LANC interface circuit 10 and RS232C interface circuit 13 can be saved.

While the plug 7-1 (3 poles) or plug 7-2 (4 poles) is inserted in the jack 2, the contact (d) and contact (e) of the jack 2 contact with each other, and the contact (e) is connected to the 3-volt power source EVER 3V through the diode 36 and resistor 35, and therefore a high level H is detected at the XLANC JACK N terminal for detecting insertion of jack of the HI controller 11. At this time, the HI controller 11 detects

presence of plug, and advances to the next detection step as shown below. Thus, the jack insertion can be detected.

In this manner, the HI controller 11 monitors the voltage of the XLANC JACK IN terminal, and high level H is detected, so that presence of plug is detected, the XLANC ON terminal or 233C ON terminal is turned on, so that the power-saving mode of the LANC interface circuit 10 or RS232C interface circuit 13, respectively, can be canceled.

The contact (a) of the jack 2 is connected to one end of a resistor 23 (470 k Ω), and the other end of the resistor 23 (470 k Ω) is connected to one end of a resistor 24 (150 k Ω). Also one end of the resistor 23 (470 k Ω) is connected to one end of a resistor 22 (4.7 k Ω), and the other end of the resistor 22 (4.7 k Ω) is connected to the other end of the resistor 24 (150 k Ω). The junction of the other end of the resistor 22 (4.7 k Ω) and the other end of the resistor 24 (150 k Ω) is connected to the supply voltage D 2.8 V. Between one end of the resistor 22 (4.7 k Ω) and the contact (a) of the jack 2, a diode 25 is connected in the forward direction, and between the junction of other end of the resistor 23 (470 k Ω) and one end of resistor 24 (150 k Ω) and the ground, a Zener diode 26 of withstand voltage of 3.3 V is connected in the reverse direction.

Herein, a parallel circuit of resistor 22 (4.7 k Ω), with resistor 23 (470 k Ω) and resistor 24 (150 k Ω), or a series circuit of resistor 23 (470 k Ω) and resistor 24 (150 k Ω) each composes a voltage divider. When a current flows from the supply voltage D 2.8 V in the direction of contact (a) of the

jack 2, the potential difference of the supply voltage D 2.8 V and contact (a) of the jack 2 is divided into the junction of other end of resistor 23 (470 k Ω) and one end of resistor 24 (150 k Ω) according to the resistance value of each resistor of the parallel circuit and series circuit. When a current flows in the direction of supply voltage D 2.8 V from the contact (a) of the jack 2, the potential difference of the contact (a) and supply voltage D 2.8 V is divided into the junction of the other end of resistor 23 (470 k Ω) and one end of resistor 24 (150 k Ω) according to the resistance value of each resistor of the series circuit.

Accordingly, in detecting insertion of a plug in the jack 2, when presence of the plug is detected, the HI controller 11 discriminates the plug inserted in the jack 2, whether the plug for LANC signal or the plug for RS-232C signal, depending on the voltage level detected at the 232C SENS (AD) terminal. At the inner side of the 232C SENS (AD) terminal, an analog/digital converter (A/D converter) is provided, and the detected voltage is converted into a digital value, and is compared with a specified set value (threshold value) by comparing means.

Therefore, when the plug inserted into the jacket 2 is for RS-232C signal, as shown in FIG. 3B, since the RS-232C signal is +10 V to -10 V, a transmission signal 232C TD of +10 V to -10 V is supplied to the contact (a) of the jack 2. When +10 V is supplied to the contact (a) of the jack 2, the HI controller 11 detects a high level H not exceeding 3.3 V at the 232C SENS (AD) terminal, but when -10 V is supplied to the

09604632.062700

contact (a) of the jack 2, the HI controller 11 detects a low level L at the 232C SENS (AD) terminal. It is for the purpose of protecting the elements in the 232C SENS (AD) terminal of the HI controller 11 that the input level is limited to 3.3 volts by the Zener diode 26 of withstand voltage of 3.3 V.

On the other hand, when the plug inserted into the jack 2 is for LANC signal, as shown in FIG. 3A, the LANC signal ranges from 0 V to +5 V, but a grounding signal GND of 0 V is always supplied to the contact (a) of the jack 2. When 0 V is supplied to the contact (a) of the jack 2, the HI controller 11 detects a medium level M of near 1 V at the 232C SENS (AD) terminal.

Thus, in discriminating whether the plug inserted in the jack 2 is the plug for LANC signal or the plug for RS-232C signal, the HI controller 11, when detecting high level H at the 232C SENS (AD) terminal, judges an open state, not being connected to a peripheral device (although the plug for RS-232C signal may be connected, it is judged that the RS-232C interface is turned off), and therefore the HI controller 11 turns off the XLANC ON terminal, and turns on the 232C ON terminal.

The HI controller 11 judges that the plug for LANC signal is connected when the medium level M is detected at the 232C SENS (AD) terminal, and the HI controller 11 turns off the XLANC ON terminal, and turns off the 232C ON terminal.

The HI controller 11 judges that the plug for RS-232C signal is connected and that the RS-232C interface is ON when the low level L is detected at the 232C SENS (AD) terminal, and

the HI controller 11 turns off the XLANC ON terminal, and turns on the 232C ON terminal.

Thus, when judging that the plug for RS-232C signal is connected and that the RS-232C interface is ON, the HI controller 11 does not accept the LANC signal, or ignores it if LANC signal is supplied.

In this manner, the HI controller 11 detects the voltage level of the 232C SENS (AD) terminal, and determines the active state of the LANC interface circuit 10 or RS232C interface circuit 13.

When the plug for RS-232C signal is connected, the input impedance of the RS-232C interface is specified at 3 k Ω to 7 k Ω in standard, and therefore detection of a voltage drop by voltage divider in this case is equivalent to detection of this input impedance.

The threshold of each voltage level at the 232C SENS (AD) terminal of the HI controller 11 in this case is set, for example, in the EEPROM and judged on the basis of the set value.

By varying the setting of the voltage divider, and raising the resolution of each voltage level to be detected corresponding to the threshold, not limited to two interfaces, for example, two to four interfaces can be discriminated by detecting each different impedance.

By thus detecting the type of signals, using this result of discrimination, the HI controller 11 optimizes the internal control, and controls the output of several interfaces.

This optimization process by detection of insertion

of the jack, by detection of the type of a signal and according to the result of discrimination, is executed by the software stored in the HI controller 11.

As a result, when the HI controller 11 detects the medium level M at the 232C SENS (AD) terminal, the XLANC ON terminal is turned on, and a transistor 34 is turned on, and the three-volt power source EVER 3V is supplied to the EVER 3V terminal which is the supply voltage of the LANC interface circuit 10 through the transistor 34. The LANC interface circuit 10 supplies the power source LANC DC to contact (b) and contact (c) of the jack 2 from the LANC DC terminal

Thus, in the supply line of power source LANC DC of LANC signal, no transistor or switch is needed, and power element such as a power transistor is not used, so that loss of supply voltage is eliminated.

The LANC interface circuit 10 sends LANC signal LANC SIG shown in FIG. 3A for transmission (T1) from the LANC SIG terminal to the contact (e) of the jack 2, and the LANC interface circuit 10 feeds the LANC SIG for reception (T2) into the LANC SIG terminal from the contact (e) of the jack 2. In this case, since the HI controller 11 is turning off the 232C ON terminal, only the LANC signal LANC SIG of 0 V to 5 V of two-way signals of transmission and reception signals multiplexed by time sharing is supplied in the contact (e) of the jack 2.

When the HI controller 11 detects high level H or low level L at the 232C SENS (A/D) terminal, the 232C ON terminal is turned on, and the transistor 30 and transistor 31 are both

turned on, and the reception signal of RS-232C is supplied from the contact (e) of the jack 2 to 232C RD terminal for reception.

In this case, as shown in FIG. 3B, since the RS-232C signal is +10 V to -10 V, the input level is limited to 7.5 volts by the Zener diode 32 of withstand voltage of 7.5 V, and the limit RS-232C signal of 0 V to 7.5 V shown in FIG. 3C is supplied to the 232C RD terminal for reception of RS232C interface circuit 13. This limiting of the input level at 7.5 volts by the Zener diode 32 of withstand voltage of 7.5 V is for protection of the LANC interface circuit 10 (absolute maximum rating 11 V/rating 8 V) of an input level of 0 V to 5 V.

Herein, on the 232C RD terminal side of the RS232C interface circuit 13, regarding the limit RS-232C signal of 0 V to 7.5 V shown in FIG. 3C, it is composed to judge 0 V to 0.8 V as a low level L, and 2.0 and over (up to 7.5 V) as a high level as indicated by shaded area. This criterion is the same as the judgement of the LANC interface circuit 10 for the LANC signal of 0 V to 5 V. The reception signal is supplied into the RXD terminal for reception processing of a digital still (DS) controller 12 at a later stage, and the signal is processed internally.

Thus, in the reception line of the main body of the RS232C signal, amplitude limiting means (Zener diode 32) of reception signal is provided, and if either one of two signals is received, the internal element of the LANC interface circuit 10 or RS232C interface circuit 13 will not be broken.

Further, by sharing the transmission and reception

line of a two-way LANC SIG signal of the LANC signal, and the reception line of a reception signal 232C RD signal of the RS232C signal, the lines connected inside the jack 2 can be decreased by one.

The reception element in the RS232C interface circuit 13 for the RS232C signal is designed to discriminate the data at the same signal level as the LANC signal, so that signal processing at a later stage is easier.

When the HI controller 11 turns on the 232C ON terminal, the XSTBY terminal for standby processing of the RS232C interface circuit 13 is turned on.

From the 232C TD terminal of the RS232C interface circuit 13, a transmission signal is supplied to the contact (a) of the jack 2 for transmission. The transmission signal is supplied into the RS232C interface circuit 13 from the TXD terminal of the digital still (DS) controller 12 of a later stage. The DS controller 12 is a controller for data converter for generating of digital still data.

Thus, in the transmission line of the RS232C signal inside the main body, there is no amplitude limiting means, and hence no effect is caused on the signal level required on the peripheral device side connected with the main body through plug and cable.

When using the LANC signal, the three-pole plug 7-1 is composed so that the transmission line of the RS232C signal from the main body may be connected to the ground connecting part GND of the plug 7-1 by the contact (a) of the jack 2, and

therefore, when using the LANC signal, a transmission signal of the RS232C signal is not transmitted by mistake from the main body.

The DS controller 12 and HI controller 11 exchange specified data through the serial input and output port (SIO), and data is supplied from the DS controller 12 to the HI controller 11 through a common terminal.

Data is supplied from the HI controller 11 to the LANC interface circuit 10, and from LANC interface circuit 10 to the HI controller 11, through input and output ports.

So as not to exchange data when the XLANC ON terminal of the HI controller 11 is OFF, the input and output ports on the HI controller 11 side are masked.

A voltage of 3 volts is always supplied from the supply voltage EVER 3V to the XLANC POWER ON terminal for feeding supply voltage of the HI controller 11.

When the open contact OPEN of the plug 7-2 for RS-232C touches the contact (b) of the jack 2, the contact (c) contacts with the contact (b), which is intended to prevent the supply voltage LANC DC from going outside through the LANC DC terminal of the LANC interface circuit 10.

In such a combination of hardware and software, by discriminating the type of an input signal and changing over the control depending on the result of detection, when the plug 7-1 for LANC signal is inserted into the main body jack 2, the LANC signal (type A signal) can be used between the main body and the connected peripheral device, and when the plug 7-2 for the RS-

232C signal is inserted into the main body jack 2, the RS-232C signal (type B signal) can be used between the main body and the connected peripheral device.

The input and output apparatus of the embodiment can send out the LANC signal or RS-232C signal as a control signal from the LANC interface circuit 10 or RS232C interface circuit 13 as signal processors, by the HI controller 11 as a controller through transmission paths of cables 6-1, 6-2, 6-n, plugs 7-1, 7-2, 7-2, and jack 2, and also control the signal processor by the controller on the basis of a control signal supplied from the outside.

In particular, the 232C SENS (AD) terminal of the HI controller 11 is provided as signal discrimination changeover means for discriminating the type of the LANC signal or RS-232C signal as a control signal entered through the transmission paths, generating a discrimination signal, and supplying it into the controller, and changing over the control of the LANC interface circuit 10 and RS232C interface circuit 13 as the signal processors for the controller on the basis of the discrimination signal, and therefore input and output of plural control signals can be processed through the cable, plug and jack as the single transmission path.

As a result, not requiring a large transmission path, input and output of plural control signals can be processed by a single transmission path alone. And in spite of the principle that different signals cannot be passed on the same transmission path, they can be passed on the same transmission path by

optimizing the transmission and reception path of one signal or other signals and the transmission and reception elements. And since power element is not provided in the transmission path, the parts mounting area can be saved, and by discriminating the types of control signals, states of various types of signals can be detected.

In the signal input and output apparatus of the embodiment, as described above, plural control signals, such as LANC signals or RS-232C signals, are individually different in input and output levels, and it is the principle that signals of different levels cannot be passed on the same transmission path, they can be passed on the same transmission path without destroying the elements by optimizing the transmission and reception path of one signal and other signals and the transmission and reception elements.

In the signal input and output apparatus of the embodiment, as described above, discrimination of the type of the LANC signal or RS-232C signal as control signals in the HI controller 11 as signal discrimination changeover means is realized on the basis of the control signal at the jack 2 as the coupling for the signal discrimination changeover means of the transmission path for input and output of control signals, so that the types of control signals can be discriminated securely by raising the resolution.

In the signal input and output apparatus of the embodiment, as described above, the HI controller 11 as the signal discrimination changeover means changes over to

00604632-062700

inactivate the control system of the LANC signal or RS-232C signal as a control signal of another type than the one discriminated on the basis of the discrimination signal, and therefore transmission or reception of other signals by mistake is eliminated during transmission or reception of a certain signal, so that processing can be changed over

In the embodiment, the LANC signal and RS-232C signal are mentioned, but without being limited to either of them, there also can be constitution in which any other arbitrary interface signal can be discriminated.

The signal input and output apparatus of the invention is for issuing a control signal from a signal processor to the outside by a controller through a transmission path, and controlling the signal processor by the controller on the basis of a control signal entered from the outside.

In particular, it comprises signal discrimination changeover means for discriminating the type of the control signal entered through the transmission path, generating a discrimination signal, supplying it into the controller, and changing over the control of the signal processor to the controller on the basis of the discrimination signal, and hence input and output of plural control signals are processed through a single transmission path.

As a result, therefore, not requiring a large transmission path, input and output of plural control signals can be processed by a single transmission path alone, and in spite of the principle that different signals cannot be passed

09504632.062700

on the same transmission path, they can be passed on the same transmission path by optimizing the transmission and reception path of one signal and other signal and the transmission and reception elements, and moreover since power element is not provided in the transmission path, the parts mounting area can be saved, and by discriminating the types of control signals, state of various types of signals can be detected.

In the signal input and output apparatus of the invention, as mentioned above, the plural control signals are individually different in input and output levels, and therefore in spite of the principle that signals of different levels cannot be passed on the same transmission path, they can be passed on the same transmission path without destroying the elements by optimizing the transmission and reception path of one signal and other signals and the transmission and reception elements.

In the signal input and output apparatus of the invention, as mentioned above, discrimination of the type of the control signals in the signal discrimination changeover means is carried out on the basis of the level of the control signal at a coupling to the signal discrimination changeover means of the transmission path for input and output of control signals, and therefore types of control signals can be discriminated securely by raising the resolution.

In the signal input and output apparatus of the invention, as mentioned above, the signal discrimination changeover means changes over the control system of the control

signal of other type than the one discriminated according to the discrimination signal so as to be inactive, and therefore transmission or reception of other signals by mistake is eliminated during transmission or reception of a certain signal, so that processing can be changed over.

09604632.062700

Having described preferred embodiments of the present invention with reference to the accompanying drawings, it is to be understood that the present invention is not limited to the above-mentioned embodiments and that various changes and modifications can be effected therein by one skilled in the art without departing from the spirit or scope of the present invention as defined in the appended claims.

09604632-062700

What is claimed is:

1. A signal input and output apparatus for issuing a control signal from a signal processor to the outside by a controller through a transmission path, and controlling said signal processor by said controller on the basis of a control signal entered from the outside, comprising:

signal discrimination changeover means for discriminating the type of the control signal entered through the transmission path, generating a discrimination signal, supplying into said controller, and changing over the control of said signal processor to said controller on the basis of the discrimination signal, wherein

input and output of plural control signals are processed through a single transmission path

2. The signal input and output apparatus of claim 1, wherein

the plural control signals are individually different in input and output levels.

3. The signal input and output apparatus of claim 1, wherein

discrimination of the type of the control signals in said signal discrimination changeover means is carried out on the basis of the level of the control signal at a coupling to said signal discrimination changeover means of the transmission

path for an input and output of control signals.

4. The signal input and output apparatus of claim 1, wherein

said signal discrimination changeover means changes over the control system of the control signal of a type other than the one discriminated according to the discrimination signal so as to be inactive.

5. The signal input and output apparatus of claim 1, wherein:

one of said plural control signals is an RS-232C signal.

6. A signal input and output method, being a signal input and output method for issuing a control signal from a signal processor to outside by a controller through a transmission path, and controlling said signal processor by said controller on the basis of a control signal entered from outside, comprising:

a signal discriminating step of discriminating the type of the control signal entered through the transmission path by signal discriminating means,

a supplying step of supplying a discrimination signal generated by said signal discriminating means into said controller, and

a changeover step of changing over the control of

09604632.062700

said signal processor to said controller on the basis of the discrimination signal, wherein:

input and output of plural control signals are processed through a single transmission path.

7. The signal input and output method of claim 6, wherein:

the plural control signals are individually different in input and output levels.

8. The signal input and output method of claim 6, wherein:

discrimination of type of the control signals at said signal discrimination step is carried out on the basis of the level of the control signal at a coupling to said signal discriminating means of the transmission path for input and output of control signals.

9. The signal input and output method of claim 6, further comprising:

a step of changing over the control system of the control signal of other type than the one discriminated according to the discrimination signal so as to be inactive.

10. The signal input and output method of claim 6, wherein:

one of said plural control signals is an RS-232C

signal.

09604632.062700

ABSTRACT OF THE DISCLOSURE

In order to propose a signal input and output apparatus for changing over control depending on a detection result by discriminating the type of signals when signals of two or more types are passed in the same signal line, a signal input and output apparatus comprises signal discrimination changeover means for discriminating the type of control signal through cable, plug and jack, as a transmission path generating a discrimination signal, supplying it to a controller, and changing over the control of a signal processor to the controller on the basis of the discrimination signal, and thereby input and output of plural control signals can be processed through a single transmission path. As a result, by a single jack only, plural signals can be passed on the same transmission path by optimizing the transmission and reception paths and transmission and reception elements, and therefore the parts mounting area can be saved, and states of various types of signals can be detected.

09604632-062700

FIG. 1

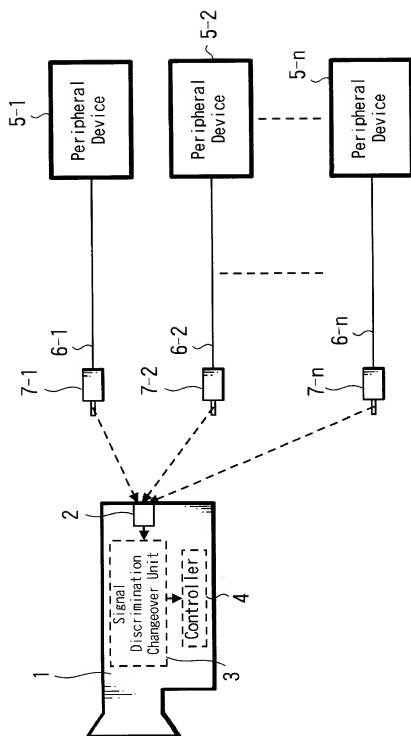


FIG. 2

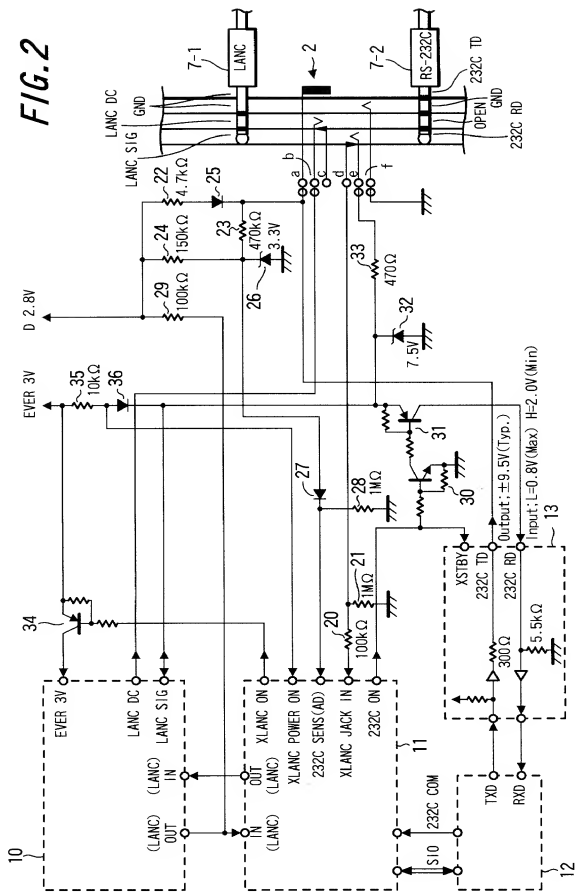
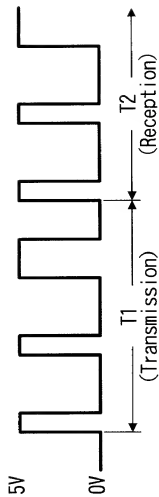
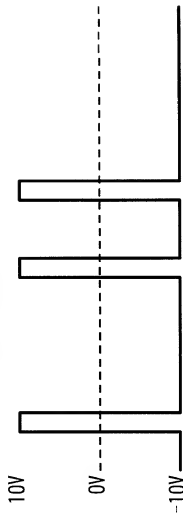
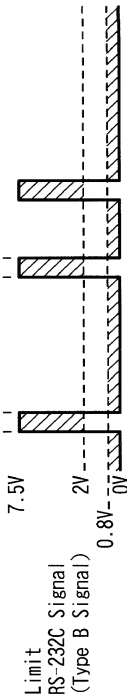


FIG. 3A**FIG. 3B****FIG. 3C**

DECLARATION FOR PATENT APPLICATION (JOINT OR SOLE)

(Under 37 CFR § 1.63; with Power of Attorney)

FROMMER LAWRENCE & HAUG LLP

FLH File No. 450100-02579

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention ENTITLED:

SIGNAL INPUT AND OUTPUT APPARATUS

the specification of which

X is attached hereto._____ was filed on _____ as Application Serial No. _____,
with amendment(s) through _____ (if applicable, give dates).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Sec. 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)	List additional applications on separate page(s):	Priority Claimed:
Number: 11-183817	Country: Japan	Filed (Day/Month/Year): 29 June 1999
		Yes No
		X

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code § 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Sec. 1.56, which became available between the filing date of the prior application and the national or PCT international filing date of this application:

Prior U.S. Application(s)	List additional applications on separate page(s):
App'n. Ser. Number: _____	Filed (Day/Month/Year): _____
	Status (patented, pending, abandoned): _____

I hereby appoint WILLIAM S. FROMMER, Registration No. 25,506, and DENNIS M. SMID, Registration No. 34,930 or their duly appointed associate, my attorneys, with full power of substitution and revocation, to prosecute this application, to make alterations and amendments therein, to file continuation and divisional applications thereof, to receive the Patent, and to transact all business in the Patent and Trademark Office and in the Courts in connection therewith, and specify that all communications about the application are to be directed to the following correspondence address:

WILLIAM S. FROMMER, Esq.
c/o FROMMER LAWRENCE & HAUG LLP
745 Fifth Avenue
New York, New York 10151

Direct all telephone calls to:
(212) 588-0800
to the attention of:
WILLIAM S. FROMMER

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

INVENTOR(S):

Signature: _____ Date: _____

Full name of sole or first inventor: HIROKAZU NAGASAWAResidence: Kanagawa, JapanCitizenship: Japan

Signature: _____ Date: _____

Full name of 2nd joint inventor (if any): YOSHITSUGU NOMIYAMAResidence: Tokyo, JapanCitizenship: Japan

Signature: _____ Date: _____

Full name of 3rd joint inventor (if any): MASAOKI KOJIMAResidence: Tokyo, JapanCitizenship: Japan

[Similarly list additional inventors on separate page(s)]

Post Office Address(es) of inventor(s):

[If all inventors have the same post office address]

Sony Corporation
7-35 Kitashinagawa 6-chome
Shinagawa-Ku, Tokyo 141, Japan

Note: In order to qualify for reduced fees available to Small Entities, each inventor and any other individual or entity having rights to the invention must also sign an appropriate separate "Verified Statement (Declaration) Claiming [or Supporting a Claim by Another for] Small Entity Status" form [e.g. for Independent Inventor, Small Business Concern, Nonprofit Organization, individual Non-Inventor].

Note: A post office address must be provided for each inventor.